



V.1.0 GB
REV 06-07.2017.

High Performance Additives

MPEX[®]

FRICTION FIGHTER

Technical Datasheet





V.1.0 GB
REV 06-07.2017.

High Performance Additives

TDS

| | |
|---------------------|--|
| Colour/Type | Amber, gold / Friction Fighter |
| Areas of usage: | For all petrol, diesel and LPG engines with or without turbochargers |
| Environment: | Please check local requirements and MSDS |
| Packaging: | 300ml Container |
| PPE: | Avoid skin contact. Refer to MSDS |
| Storage: | N/A |
| Surface prep: | None |
| Equipment needed: | None |
| Tests: | ISO9001. (For further information contact Leading Solvent Supplies Ltd) |
| Applying/Drying | Add contents of one bottle to the warm motor oil, preferably shortly after oil change. |
| Origin/Manufacture: | Leading Solvent Supplies Ltd |





V.1.0 GB
REV 06-07.2017.

High Performance Additives

Useful Information

How to optimise the use of MPEX® Friction Fighter

Applications:

MPEX® Friction Fighter is a new generation, ashless, boron ester based friction reducer, which adds unique features to any standard motor oil. The ceramic coating will stick to the surface of internal engine parts, even when the engine is off, providing immediate anti-wear protection at start-up. Providing long term protection of your engine, in addition restoring engine power, reducing fuel and oil consumption and reducing emission of hazardous exhaust gases.


Method of use:

Add contents of one bottle to the warm motor oil, preferably shortly after oil change. Let the engine run for a few minutes to optimize mixing of the additive with the engine oil. Make sure the oil contents do not exceed the maximum oil level.

Dosage:

One bottle treats 4 to 6 litres of motor oil.
Recommended use: every oil change.

Results:

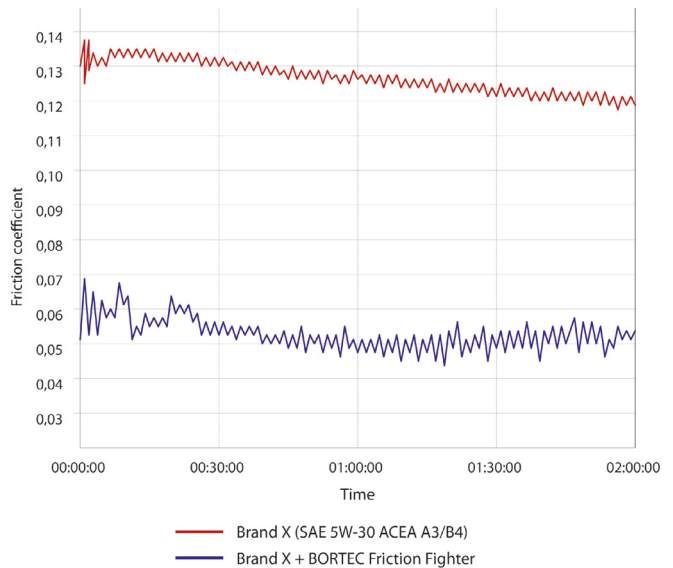

IMPORTANT

MPEX® Are manufactured by Leading Solvent Supplies Ltd. MPEX® products information are based on laboratory tests and practical experience. Since the conditions under which the product is used are often outside the control of Leading Solvent Supplies Ltd, we can only guarantee the product quality, since the result is dependent on the substrate, pre-treatment, temperature, air humidity, application etc. Leading Solvent Supplies Ltd reserves the right, without notice to change the product and the given data.

